



DATASHEET

ILX56-PBS PROFIBUS DPV1 Slave for ControlLogix®


ProSoft Technology®

The ILX56-PBS PROFIBUS DPV1 Multi-Slave module allows Rockwell Automation® ControlLogix® processors to communicate on a PROFIBUS DP protocol network by emulating up to 10 individual slave devices.

This multi-slave support of the module provides the ability to pass up to 2440 bytes of input and output data as high-speed cyclic I/O data on a PROFIBUS DP network.

Combined with the use of multiple I/O connections back to the ControlLogix processor, this module provides data update rates that will meet even the most demanding of PROFIBUS DP applications.

In addition, with the use of the PLX50 Configuration Utility you have advanced features such as custom-built Add-On Routines and a PROFIBUS DP packet capture utility to minimize the amount of time and effort in getting a ControlLogix PAC operating on a PROFIBUS DP network.

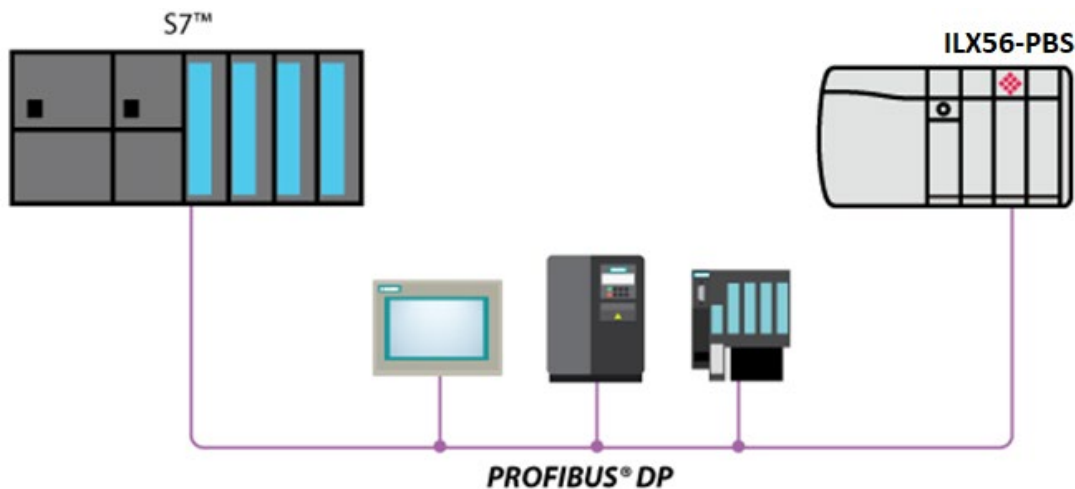

Features

- ◆ Rockwell Automation Encompass™-Approved Solution
- ◆ Remote diagnostics via configuration utility with built-in PROFIBUS DP packet capture utility
- ◆ Multi-slave mode allows module to emulate up to 10 individual slaves for transfer of up to 2440 bytes of cyclic I/O data
- ◆ Supports DPV1 Acyclic Messaging
- ◆ Add-On Profile and custom Add-On Routines provided to allow for seamless integration to Studio 5000
- ◆ Can emulate the PROFIBUS DP Identification number of the ProSoft MVI56-PDPS module to allow replacement of legacy modules without having to reprogram the PROFIBUS DP master device (Note: Requires ladder logic changes).
- ◆ Video setup tutorial provided on www.prosoft-technology.com

PROFIBUS DP Slave Specifications

Specification	Description
Multi-Slave Support	Emulate up to 10 individual slaves
Input/Output	Maximum 244 Bytes per slave
Input Data	Maximum of 2440 bytes (244 per slave)
Acyclic Data	DPV1
Status Data	88 Bytes
Output Data	Maximum 2440 Bytes (244 per slave)
DPV1 Services	Class 1 Read/Write, Class 1 Alarm
Services	Global-Control, Slave-Diagnostic, Set-Parameter
Sync, Freeze Command	Supported
Baud rate	9.6 kBaud, 19.2 kBaud, 45.45 kBaud, 93.75 kBaud, 187.5 kBaud, 500 kBaud 1.5 MBaud, 3 MBaud, 6 MBaud, 12 MBaud Auto-detection mode is supported

Hardware Specification

Specification	Description
PROFIBUS Interface	RS-485, max. 12 Mbps, potential free, according EN 50170
Power Supply	450 mA @ 5 Vdc 2 mA @ 24 Vdc
Dimensions	Standard 1756 Single-slot module
Burst	EN 61000-4-4, 2 kV, 5 kHz
Surge	EN 61000-4-5, 2 kV common mode, 1 kV differential mode
ESD	EN 61000-4-2, 4 kV contact, 8 kV air, 4 kV indirect
Radiated/Conducted Immunity	EN 61000-4-3, 10 V/m, 30 to 1000 MHz, 80% AM, 1 kHz sine wave EN 61000-4-6, 10 V, 0,15 to 80 MHz
Radiated/Conducted Emission	EN 55011 Class A
Vibration/Shock (operating)	IEC 600068-2-6, 10 to 500 Hz, $\pm 0,75$ mm, ± 2 g, 1 Octave/min IEC 600068-2-27, 30 g, 11 ms
Operating Temperature	0°C to 60°C (32°C to 140°F)
Relative Humidity	5 to 95% (non-condensing)

Agency Approvals & Certifications

Please visit our website: www.prosoft-technology.com



Where Automation
Connects™

Global Distribution

ProSoft Technology® products are distributed and supported worldwide through a network of over 500 distributors in over 50 countries. Our knowledgeable distributors are familiar with your application needs. For a complete list of distributors, go to: www.prosoft-technology.com

Ordering Information

To order this product, please use the following:

PROFIBUS Slave Network Interface Module for ControlLogix

ILX56-PBS

To place an order, please contact your local ProSoft Technology distributor. For a list of ProSoft Technology distributors near you, go to: www.prosoft-technology.com and select *Where to Buy* from the menu.

Copyright © 2022 ProSoft Technology, Inc.
All Rights Reserved. May 26, 2022
For Public Use.

Specifications subject to change without notice.