

2.4 GHz Directional 6dBi Panel MIMO antenna A2406S3-DP

The A2406S3-DP 2.4 GHz Multiple-Input, Multiple-Output (MIMO) patch antenna is designed to operate with enterprise-class 802.11n radios. The antenna features three integrated 2.4 GHz patch antennas in one enclosure, making it an ideal antenna to support demanding indoor or outdoor applications. Includes Universal Articulating Mount for an easy and flexible wall/mast mount installation.




Features	Benefits
MIMO (Multile-Input, Multiple-Output)	<ul style="list-style-type: none"> ◆ Three antennas within a single enclosure ◆ Send more data simultaneously, or ◆ Improve the ability of the radio to receive weak signals, therefore giving better range
Directional	<ul style="list-style-type: none"> ◆ Allows increased performance on transmit and receive ◆ Focused signal reduces interference from unwanted sources ◆ Use on repeaters to maximize signal strength and reliability
Rugged and weatherproof	<ul style="list-style-type: none"> ◆ Suitable for demanding indoor or outdoor applications ◆ Unobtrusive, aesthetically pleasing design ◆ Easy and flexible wall or mast-mounted installation
Backed by ProSoft Technology®	<ul style="list-style-type: none"> ◆ 20-year history of delivering high-quality, reliable solutions designed with you in mind ◆ Free, unlimited, worldwide Technical Support by phone anytime for pre-sale, set-up, or troubleshooting support help you get going sooner and stay running longer ◆ Three-Year Warranty ensures reliability and protects against equipment failures ◆ Free ProSoft Software tools tightly integrated with our gateway hardware...a simple and quick, total solution to help you make our gateways fit your applications ◆ Indoor/outdoor radio network design assistance – accessory selection, path studies, and site survey

Compatibility

All antennas have been tested for compatibility with RadioLinx products. Please see the ProSoft Wireless Designer (PWD) configuration tool to assist you in choosing the best antenna for your application.

Specifications


Frequency Range	2.4 GHz to 2.5 GHz
Bandwidth	100 MHz
Gain	6 dBi
Vertical Beamwidth	72°
Horizontal Beamwidth	82°
Front-to-back Ratio	≥ 18 dB
VSWR	≤ 1.5
Nominal Impedance	50 Ohms
Polarization	Vertical
Max Power	50 Watts
Connector	RP SMA Plug with 36" Pigtail (x3)
Dimensions	11 in x 6.1 in x 1 in (28 cm x 15.5 cm x 2.5 cm)
Weight	1.2 lbs (0.544 kg)
Operating Temperature Range	-22° F to 158° F (-30° C to 70° C)
Mounting Style	Wall Mount / Mast Mount

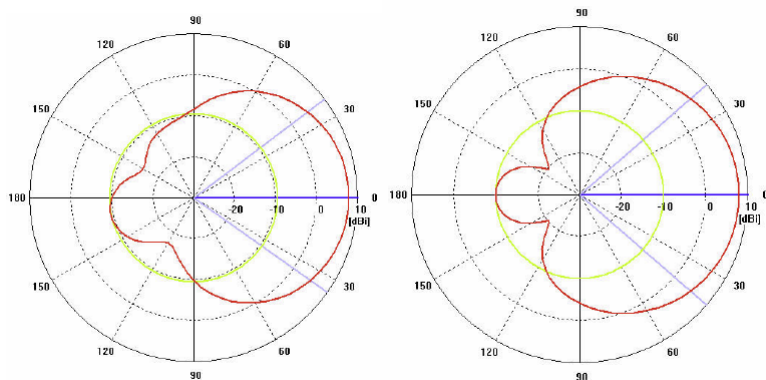


Vertical Radiation Pattern

Horizontal Radiation Pattern

Flush Wall Mount Example

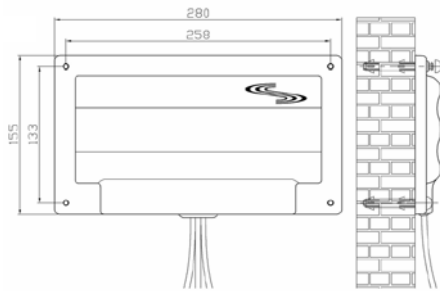

Mast / Wall Mount Example

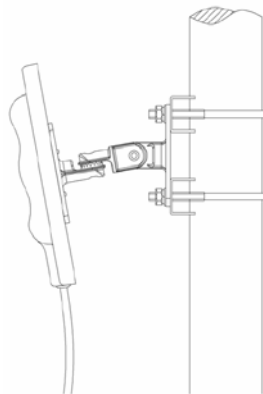

Additional Products

ProSoft Technology® offers a full complement of hardware and software solutions for a wide variety of industrial communication platforms.

For a complete list of products, visit our web site at:
www.prosoft-technology.com

Ordering Information

To order this product, please use the following:

2.4 GHz Directional 6dBi Panel MIMO antenna

A2406S3-DP

To place an order, please contact your local ProSoft Technology distributor. For a list of ProSoft Technology distributors near you, go to:
www.prosoft-technology.com
 and select Distributors from the menu.

Place your order by email or fax to:

North American / Latin American / Asia Pacific
orders@prosoft-technology.com
 fax to +1 661.716.5101

Europe / Middle East / Africa
europe@prosoft-technology.com
 fax to +33 (0) 5.61.78.40.52

Copyright © 2010 ProSoft Technology, Inc., all rights reserved. February 23, 2010

Specifications subject to change without notice.